



**EUROPEAN NEW CAR ASSESSMENT PROGRAMME
(Euro NCAP)**

FILM & PHOTO PROTOCOL

Version 1.4
July 2023

Copyright 2023 ©Euro NCAP - This work is the intellectual property of Euro NCAP. Permission is granted for this material to be shared for non-commercial, educational purposes, provided that this copyright statement appears on the reproduced materials and notice is given that the copying is by permission of Euro NCAP. To disseminate otherwise or to republish requires written permission from Euro NCAP.

Preface

This document should always be used in conjunction with the current testing protocols for the Front MPDB, Front FW, Side Barrier, Side Pole, Pedestrian, Whiplash, LSS and AEB tests.

Table of Contents

1	INTRODUCTION	4
2	GENERAL FILM AND PHOTO REQUIREMENTS	5
2.1	Digital Data Format, Encoding and Sampling Requirements	5
2.2	Vehicle Markings	7
2.3	Camera Locations	9
2.4	Still Photographs	9
3	FRONTAL MOBILE PROGRESSIVE DEFORMABLE BARRIER IMPACT	11
3.1	Camera Locations and Views	11
3.2	Still Photographs	15
4	FRONTAL FULL WIDTH RIGID BARRIER IMPACT	17
4.1	Vehicle Markings	17
4.2	Camera Locations and Views	17
4.3	Still Photographs	20
5	SIDE MOVING DEFORMABLE BARRIER IMPACT	22
5.1	Vehicle and Barrier Markings	22
5.2	Camera Locations and Views	22
5.3	Still Photographs	26
6	SIDE OBLIQUE POLE IMPACT	28
6.1	Vehicle and Pole Markings	28
6.2	Camera Locations and Views	28
6.3	Still Photographs	31
7	WHIPLASH TESTS	32
7.1	Sled, Seat and Dummy Markings	32
7.2	Camera Locations and Views	33
7.3	Still Photographs	34
8	PEDESTRIAN SUBSYSTEM TESTS	35
8.1	Vehicle and Other Markings	35
8.2	Camera Locations and Views	35
8.3	Still Photographs	36
9	AUTONOMOUS EMERGENCY BRAKING TESTS – CAR to CAR	37
9.1	Vehicle Markings	37
9.2	Camera Locations and Views	37
9.3	Selection of Views	38
9.4	Still Photographs	39
10	AUTONOMOUS EMERGENCY BRAKING TESTS – VRU	40
10.1	Vehicle Markings	40
10.2	Camera Locations and Views	40
10.3	Selection of Views	43
10.4	Still Photographs	44
11	LANE SUPPORT SYSTEMS TEST	45
11.1	Vehicle Markings	45
11.2	Camera Locations and Views	45
11.3	Selection of Views	47
11.4	Still Photographs	47

1 INTRODUCTION

From the start, Euro NCAP test protocols have included requirements for film and photographs. High quality visuals are important to accurately record the kinematics of the impact during the test and to support the vehicle inspection and the analysis of the vehicle performance. Increasingly, however, high resolution media are needed for communication purposes such as publications on internet, social media, TV broadcasting, brochures, etc.

Euro NCAP involves several laboratories that each may have their own internal procedures, quality standards and equipment. In order to improve the consistency of material supplied by the laboratories, all film and photo requirements previously specified by Euro NCAP have been brought together, reviewed and updated. This document summarises the most recent specifications that are compulsory for all official Euro NCAP tests at the accredited Euro NCAP test laboratories.

2 GENERAL FILM AND PHOTO REQUIREMENTS

2.1 Digital Data Format, Encoding and Sampling Requirements

All films should be produced in HD format, apart from on-board camera footage. The films should be sampled at a rate of a minimum of 500 frames per second. All files (including the inspection films and crash test data) should be promptly sent to Euro NCAP Secretariat after the tests.

2.1.1 Full-Scale Crash Test Films (MPDB, FW, MDB and Pole Tests)

Three sets of films should be supplied:

a) Inspection Films

- Format: MP4 or AVI.
- Codec: H.264, Data/Bit rate: 2 Mbps.
- Resolution: Native camera resolutions.
- Frame rate: 25 fps.
- Must include burnt in timers.
- File size must be reduced before sending to Euro NCAP Secretariat, using FFMPEG free software (<https://www.ffmpeg.org>). Secretariat will supply a batch converter file separately.

b) Media Films (For Publication)

- Format: Prores422, or Avid DNxHD-145 QuickTime as an alternative.
- Codecs : Apple Prores422 / Avid DNxHD-145 Quicktime*.
- Resolution: Native camera resolutions.
- Frame rate (time base): 25 fps.
- Display mode: Progressive.
- YUV Format: 4:2:2.
- Colour Depth: 10 bit.
- Films should be supplied without “burnt in” timers, laboratory logos or text.

** If a first conversion pass is necessary prior to convert to prores422/DNxHD: Please use a minimum 10-bit codec / format, or 16-bit image sequences to maintain quality.*

c) Real-Time Films (Supplementary Camera, For Publication)

- Same specifications as for media films above. **The time window for recording should be set to record 10 seconds before the start of the car/trolley moving and 10 seconds of recording after the impact.**

2.1.2 Pedestrian Impact and Whiplash Test Films

Two sets of films should be supplied: a) inspection films and b) media films, as specified in Section 2.1.1. For the whiplash media film please only supply one view: publication wide view high severity pulse.

2.1.3 Track Test Films – AEB (VRU & Car-to-car) & LSS

To avoid errors the AEB & LSS film file name convention as detailed in Technical Bulletin TB 021 should only be used.

Only the necessary recordings should be made available: please remove bad takes and unusable video files. Only video/audio files should be shared, no other files or directory structure from the shooting card (.SIF, .XML files, etc.). The time window for recording should be set to [-5sec to +5sec]. Two sets of films should be supplied:

a) Inspection Films (to include all AEB & LSS test films – See detailed list in each relevant test section)

- Format: MP4 or AVI.
- Codec: H.264.
- Data/Bit rate: 2 Mbps.
- Resolution: Native camera resolutions.
- Frame rate: 25 fps.
- File size must be reduced before sending to Euro NCAP Secretariat, using FFMPEG free software (<https://www.ffmpeg.org>). Secretariat will supply a batch converter file separately.

b) Media Films (For Publication – See detailed list in each relevant test section)

- Format: Prores422, or Avid DNxHD-145 QuickTime as an alternative.
- Codecs : Apple Prores422 / Avid DNxHD-145 Quicktime*
- Resolution: HD 1920x1080
- Frame rate (time base): 25 fps.
- Display mode: Interlaced or progressive (depending on cameras).
- Colour Depth: 10 bit.
- Sound: Yes. (no background conversations should be audible)
- Films should be supplied without “burnt in” timers, laboratory logos or text.

** If a first conversion pass is necessary prior to convert to prores422/DNxHD: Please use a minimum 10-bit codec / format, or 16-bit image sequences to maintain quality.*

Alternatively, the following is also acceptable:

Reduced duration versions of the original camera files via QuickTime 7 Pro / FFMpeg / Any other tools capable of extracting the original video signal with no encoding process.

2.2 Vehicle Markings

2.2.1 Euro NCAP markings

Euro NCAP markings will be attached to the exterior of the vehicle in a contrasting colour (black or white) to the test vehicle such that it is clearly visible in the high speed films. Only standardised Euro NCAP (transparent) markings are allowed as supplied by the Euro NCAP Secretariat (dimensions 600 x 300 mm).

Markings on a rigid background should be used for pedestrian testing and placed on barriers, trolleys or walls (for whiplash testing for example). Test logos and numbers on a simple sheet of paper are not acceptable for publication.

Pedestrian and Whiplash Euro NCAP logo and test references should be located in the upper half of the camera view (so as not to interfere with the video overlays which are usually located at the bottom of the screen.) These markings should also be in the back ground behind the car and not in the foreground.



Examples showing correct (left) and incorrect (right) test number location, logo display material, background location.

Euro NCAP markings should be attached to the exterior of the vehicle as shown in Figure 1 below. The unique Euro NCAP test reference number should be placed below each Euro NCAP logo (see Section 2.2.3).

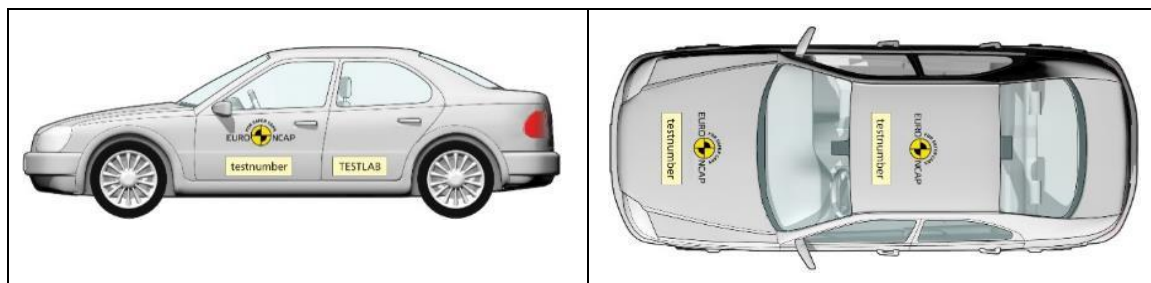


Figure 1: Standardised labels on L/R side, the bonnet and roof area of the test vehicle.

2.2.2 Test house logos

Test house logos may be added to the vehicle on the lower half of the rear doors/rear ¼ panel only for full scale tests and active safety tests. No markings to be placed on the vehicle for pedestrian sub system tests.

Test house logos should not to be placed on the roof area, on the bonnet or anywhere else on the tested vehicle.

The size of test house logos should not exceed that of the Euro NCAP official logo and should not be more prominent in the camera views than the Euro NCAP official logo.

2.2.3 Test numbers

The Euro NCAP Secretariat shall inform the laboratory of the unique Euro NCAP test number prior to the test and this should be used as the main test reference number. This number should also appear on all test data and documents. The test number should be placed in close proximity to each Euro NCAP logo, preferably underneath – if placed underneath leave a space between the logo and the test number.

Reference numbers are provided by Euro NCAP to each laboratory. Please use a vinyl plotter/cutting plotter to produce the test reference number in vinyl of the font type (Etelka Text Pro) and font size (180). Please cut out the numbers so that the full number appears on a single line. The sequence of characters of reference number should always follow the same convention, as shown in this example:

“20-NIS-123-FW1”,

where “20” is the year of test, “NIS” refers to the car brand, “123” is Euro NCAP unique key number and “FW1” is the code for the type of (re-)test. Figure 2 below illustrates examples of good and bad reference number size and spacing.

Additional internal test house numbers should be kept as small as possible (never be larger in size than the official reference number) and always be placed below the test house logo (see Section 2.2.2).



Figure 2: Examples showing correct (left) and incorrect (right) font size and reference number spacing and material.

2.3 Camera Locations

In this document, high speed camera layout diagrams are provided for each full scale, sled or track test as a guide to show what part of the vehicle and the surroundings should be in view for each particular camera at T0. Also an example frame from each camera is provided.

When attaching on-board cameras, the vehicle manufacturer should be consulted to ensure that no damage is caused to the vehicle that would influence the impact performance. Additionally, the test laboratory should be informed if the side curtain airbags are expected to deploy during the impact. Where additional equipment is added, the mass shall be compensated when achieving the final test weight. On-board lighting should be used for ALL onboard camera views. The mounting for the camera should ensure that a stable view is obtained throughout the impact without the camera oscillating due to a thin roof panel for example.

No personnel shall be visible in ANY of the high speed camera views. Sufficient lighting shall be provided so as the vehicle and occupants are clearly visible throughout the impact. Also where a camera is recording sound during a test personnel should refrain from talking, as these films are used with audio on the Euro NCAP website.

Back-up cameras are not required and it is up to the test laboratory to decide if they are necessary.

2.4 Still Photographs

Pre-test photographs will be taken with the dummies in their final positions. A list of the required photos pre-, on- and post-test is provided in each relevant test section.

If necessary, tall blank screens should be placed behind the vehicle to get a “clean” photo to avoid other test equipment or personnel appearing in the photos.

No personnel should be visible in ANY of the pre and post-test still photographs.

Stills should have the following specifications:

a) Inspection Stills

- Format: JPEG.
- Resolution: Maximum resolution that the camera allows.
- File size: Compressed (use FFMPEG software as used for compressing the test films in Section 2.1).
- File size must be reduced before sending to Euro NCAP Secretariat, using FFMPEG free software (<https://www.ffmpeg.org>). Secretariat will supply a batch converter file separately.

b) Media Stills (make sure sufficient lighting remains on)

- Format: JPEG.
- Resolution: Maximum resolution that the camera allows.
- File size: No compression or as little compression as possible (Superfine).
- The original still should not be edited.

Photos should be arranged in PRE and POST folders, labs should not separate photos into component folders such as driver, passenger, CRS, vehicle etc.

The inspection quality photos should be supplied with the crash test data. The media quality photos should be provided to the Secretariat along with the media quality films.

3 FRONTAL MOBILE PROGRESSIVE DEFORMABLE BARRIER IMPACT

3.1 Camera Locations and Views

A minimum of 9 cameras should be installed around the test vehicle, positioned as indicated in Figure 3 below. Three (4) additional on-board cameras for child and driver dummy views are to be used. A separate camera (not listed) must record the crash in real time.

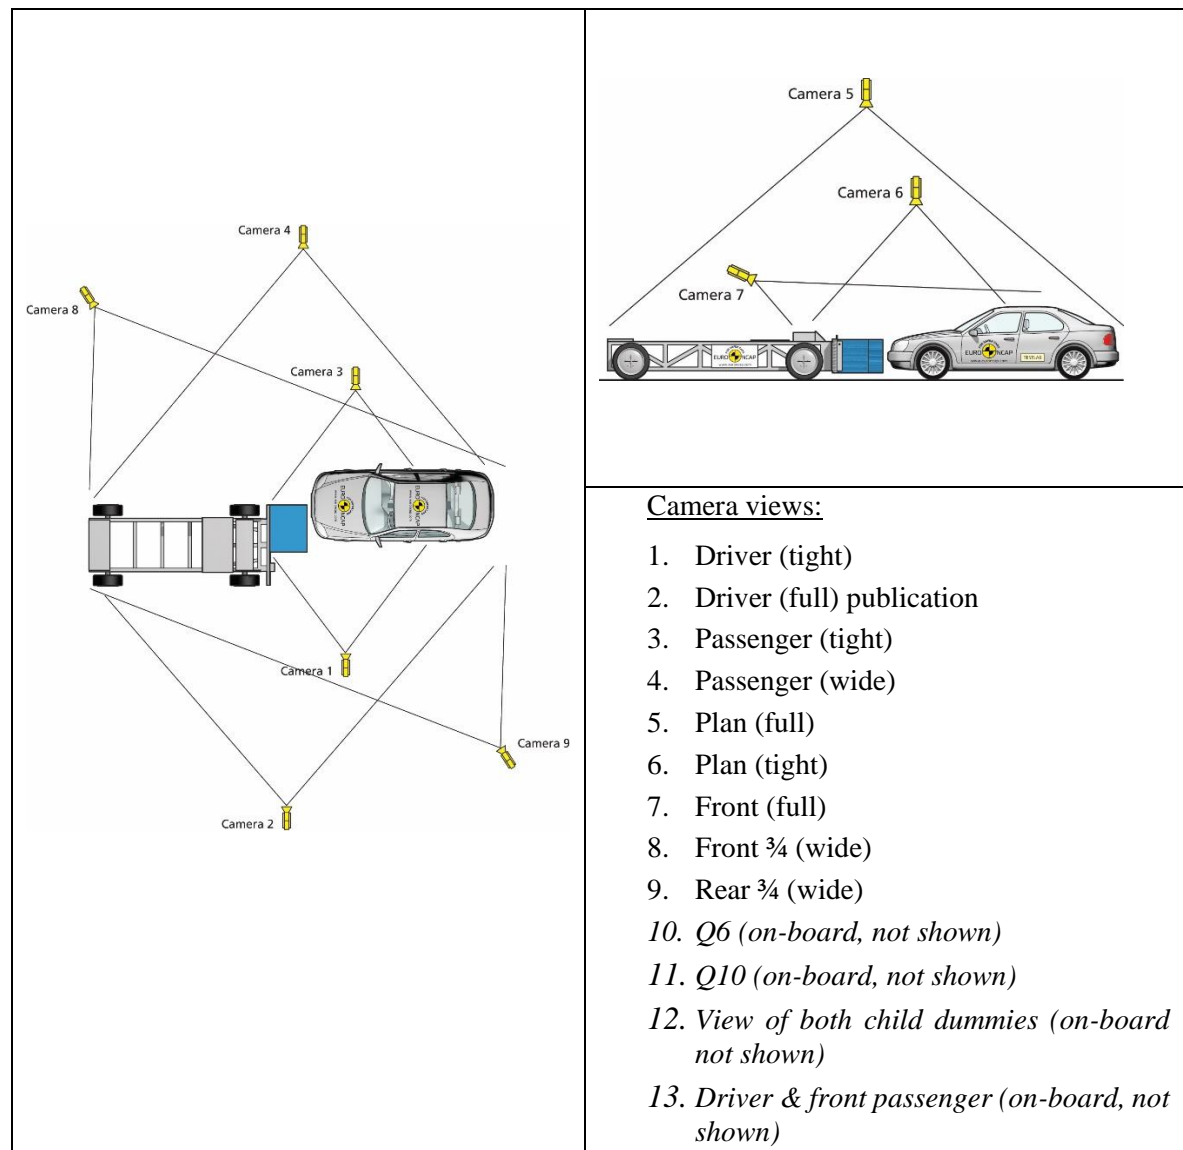











Figure 3: Locations for Cameras 1 to 9 (Frontal MPDB).





Table 1: List of camera views (Frontal MPDB).

	Camera:	1
	Filename:	1_Driver_tight
	Description :	The rear of barrier/trolley face to the b-pillar @ T0
	Camera:	2
	Filename:	2_Driver_publication
	Description :	(Space allowing) Rear of trolley to rear of vehicle @ T0
	Camera:	3
	Filename:	3_Passenger_tight
	Description :	Rear of the B-Pillar to the rear edge of the barrier trolley mount @ T0
	Camera:	4
	Filename:	4_Passenger_wide
	Description :	(Space allowing) Entire vehicle and trolley @ T0
	Camera:	5
	Filename:	5_Plan_full
	Description :	Entire vehicle and trolley @ T0 (allowing room for rotation also). Indoors this view may not be fully achievable and fish eye lens not desirable.

	Camera:	6
	Filename:	6_Plan_tight
	Description :	From b-pillar to the rear edge of trolley front tyres @ T0
	Camera:	7
	Filename:	7_Front_full
	Description :	Camera on tripod or suspended from facility roof, not on trolley . Entire vehicle front to rear edge of the barrier @ T0
	Camera:	8
	Filename:	8_Front_Passenger_angled
	Description :	Camera should be centred on impact point, $\frac{3}{4}$ angle from front passenger side.
	Camera:	9
	Filename:	9_Rear_Driver_angled
	Description :	Camera should be centred on impact point, $\frac{3}{4}$ angle from rear on driver side.

Onboard camera summary next page.

Onboard cameras:

	Camera	10 (on-board)
	Filename:	10_Q6_onboard
	Description:	Centred on 550mm head excursion line to include steering wheel. On-board lighting should be used.
	Camera:	11 (on-board)
	Filename:	11_Q10_onboard
	Description:	Camera should be centred on 450mm head excursion line. On-board lighting should be used.
	Camera:	12 (on-board)
	Filename:	12_both_Q_dummies
	Description:	Front view of both Q dummies
	Camera	13 (on-board)
	Filename:	13_driver_passenger_onboard
	Description:	Camera located rearward of front seats, view capturing both front occupants.

3.2 Still Photographs

Table 2: List of photos (Frontal MPDB).

No.	Pre	Post	Media	View
1	•	•		Front view of barrier and trolley.
2	•	•		Side view of barrier and trolley.
3	•	•		Side view of barrier and trolley at 45 degrees to front.
4		•	•	Wide view of car and barrier/trolley from LHS, showing crash lighting (for publication).
5	•	•	•	Car LHS, with camera centred on junction of B-post waist, showing full car (for publication).
6	•	•	•	Car LHS, with camera centred on B-post waist, showing rear passenger compartment (for publication).
7	•	•	•	Car LHS, with camera aimed at waist height, showing driver's compartment (for publication).
8	•	•	•	Car LHS at 45 degrees to front (for publication).
9	•	•	•	Front view of car (for publication).
10	•	•	•	Car RHS at 45 degrees to front (for publication).
11	•	•	•	Car RHS, with camera aimed at waist height, showing front passenger's compartment (for publication).
12	•	•	•	Car RHS, with camera centred on B-post waist, showing rear passenger compartment (for publication).
13	•	•	•	Car RHS, with camera centred on B-post waist, showing full car (for publication).
14	•	•		Driver and seat to show driver compartment and position of seat relative to the sill.
15	•	•		To show area immediately in front of driver.
16	•	•		To show driver's footwell area and location of dummy's feet and pedals.
17	•	•		Passenger and seat to show compartment and position of seat relative to sill.
18	•	•		To show area immediately in front of passenger.
19	•	•		To show passenger footwell area and dummy's feet.
20	•	•		To show both child dummies and restraints through LHS rear door.
21	•	•		To show both child dummies and restraints through RHS rear door
22		•		Overall view of where the car has come to rest after impact (including barrier and trolley).
23		•		To show position of all door latches and/or open doors.
24		•		To show driver knee contacts with facia (airbag should be lifted if obscuring view)
25		•		To show passenger knee contacts with facia (airbag should be lifted if obscuring view).
26	•			LHS rear seat belt anchorage with child restraint and dummy in place.
27	•			RHS rear seat belt anchorage with child restraint and dummy in place.
28		•		Q6 dummy and restraint through RHS rear door.
		•		Q10 dummy and restraint through LHS rear door.

After Dummy Removal:

No.	Pre	Post	View
31		•	Passenger compartment from rear window.
32		•	RHS interior from LHS of car.
33		•	LHS interior from RHS of car.
34		•	RHS front door area.
35		•	LHS front door area.
36		•	Facia.
37		•	Passenger footwell.
38		•	Driver footwell.
39		•	Steering wheel taken perpendicular to driver's side.
40		•	Driver right knee impact point.
41		•	Driver left knee impact point.
42		•	Passenger knee impact area.

Screen Captures / On Test Stills:

In addition to the pre- and post-test stills, a set of pictures captured during the crash (driver's view full) need to be provided, as follows: (1) the car deep into the barrier, (2) the airbag in deployment, (3) airbag fully deployed and (4) head of the dummy reaching the full extent of forward motion.

The list of photos is intended to be used as a guide and if the laboratory photographer finds some other interesting or unusual test occurrences these should also be photographed.

4 FRONTAL FULL WIDTH RIGID BARRIER IMPACT

4.1 Vehicle Markings

Euro NCAP markings should be attached to the exterior of the vehicle as shown in Figure 1, Section 2.2.1. The unique Euro NCAP test reference number should be placed below each Euro NCAP logo (see Section 2.2.3).

4.2 Camera Locations and Views

A total of 7 cameras views are required as indicated in Figure 4 below. In addition, two (2) onboard camera views are specified, for driver and rear passenger respectively and one real-time camera located on the block.

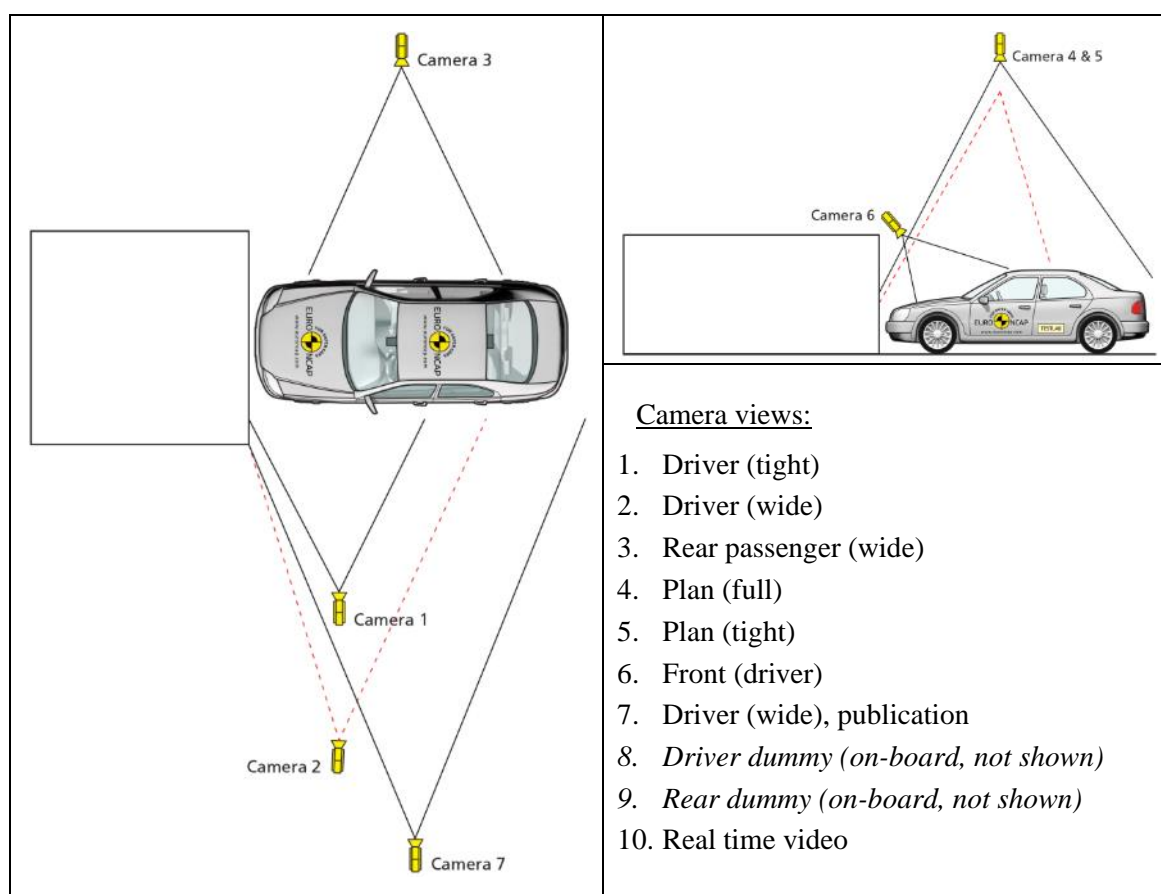









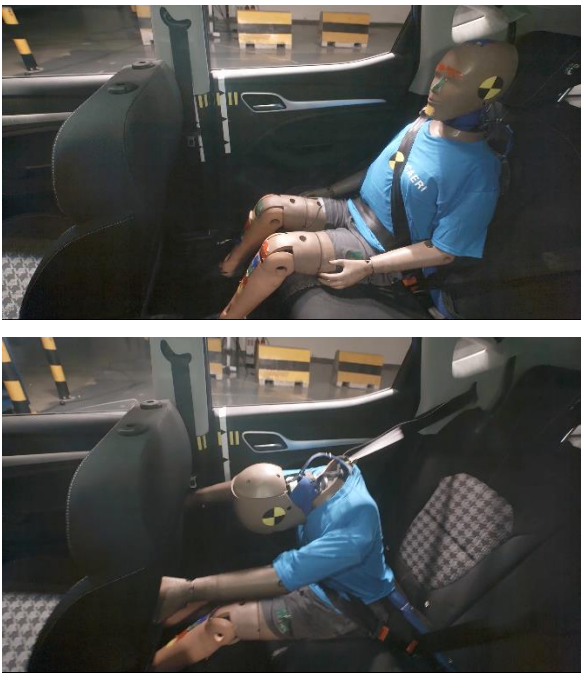



Figure 4: Locations for Cameras 1 to 7 (Frontal Full Width Rigid Barrier).

Table 3: List of camera views (Frontal Full Width Rigid Barrier).

	Camera:	1
	Filename:	1_Driver_tight
	Description:	The rear of driver dummy head to block @ T0
	Camera:	2
	Filename:	2_Driver_wide
	Description:	Front and rear occupants in view @ T0
	Camera:	3
	Filename:	3_Rear_passenger_wide
	Description:	Just rear of the passenger head to centre of front wheel
	Camera:	4
	Filename:	4_Plan_full
	Description:	Rear of the vehicle to the block. The entire vehicle should be in view @ T0
	Camera:	5
	Filename:	5_Plan_tight
	Description:	B-pillar to the block

	Camera:	6
	Filename:	6_Front_driver
	Description:	Front edge of the roof to base of windscreen/edge of bonnet
	Camera:	7
	Filename:	7_Driver_wide_publication
	Description:	Rear of vehicle to block. The entire vehicle should be in view @ T0
 	Camera:	8 (on-board)
	Filename:	8_Driver_onboard
	Description:	<p>Required view @ T0: Camera centred on driver head CoG. <u>Driver seat, belt buckle and majority of driver dummy</u> should be in view.</p> <p>Required view @ max forward movement: <u>Driver seat, belt buckle and majority of driver dummy</u> should be in view. Care should be taken to secure or route dummy cables so they do not obscure view of dummy during impact.</p>

	Camera:	9 (on-board)
	Filename:	9_Rear_dummy_onboard
	Description:	<p>Required view @ T0: Camera should be centred on excursion line with <u>dummy head</u>, <u>both femurs</u> and <u>belt buckle</u> in view.</p> <p>Required view @ max head excursion: <u>dummy head & arms</u></p>
	Camera:	10
	Filename:	10_Realtime_publication
	Description:	Camera mounted on block. Check for unwanted objects or persons in view, record sound.

4.3 Still Photographs

Table 4: List of photos (Frontal Full Width Rigid Barrier).

No.	Pre	Post	Media	View
1	•	•		Front view of block.
2	•	•		Side view of block.
3	•	•		Side view of block at 45 degrees to front.
4	•	•	•	Side view of block with vehicle (for publication).
5		•	•	Wide view of car and block LHS, showing crash lighting (for publication).
6	•	•	•	Car LHS, with camera centred on junction of B-post waist, showing full car (for publication).
7		•		Car LHS, with camera centred on B-post waist, showing rear passenger compartment.
8	•	•	•	Car LHS, with camera aimed at waist height, showing driver's compartment (for publication).
9	•	•	•	Car LHS at 45 degrees to front (for publication).
10	•	•	•	Front view of car (for publication).
11	•	•	•	Car RHS at 45 degrees to front (for publication).

No.	Pre	Post	Media	View
12	•	•	•	Car RHS, with camera aimed at waist height, showing front passenger's compartment (for publication).
13	•	•	•	Car RHS, with camera centred on B-post waist, showing rear passenger compartment (for publication).
14	•	•	•	Car RHS, with camera centred on B-post waist, showing full car (for publication).
15	•	•		Driver and seat to show driver compartment and position of seat relative to the sill.
16	•	•		To show area immediately in front of driver.
17	•	•		To show driver's foot well area and location of dummy's feet and pedals.
18	•	•		Rear passenger and seat to show compartment.
19	•	•		To show passenger foot well area and dummy's feet.
20	•	•		To show rear passenger through LHS rear door.
21	•	•		To show rear passenger through RHS rear door.
22		•		Overall view of where the car has come to rest after impact (including block).
23		•		To show position of all door latches and/or open doors.
24		•		To show driver knee contacts with facia (airbag should be lifted if obscuring view).

After Dummy Removal:

No.	Pre	Post	View
25		•	Passenger compartment from rear window.
26		•	RHS interior from LHS of car.
27		•	LHS interior from RHS of car.
28		•	RHS front door area.
29		•	LHS front door area.
30		•	Facia.
31		•	Steering wheel taken perpendicular to driver's side.
32		•	Driver right knee impact point.
33		•	Driver left knee impact point.
34		•	Rear Passenger knee impact area on rear of front seat.

Note: The above requirements are for a LHD car, for a RHD car camera locations will switch sides.

Screen Captures / On Test Stills:

In addition to the pre- and post-test stills, a set of pictures captured during the crash (driver's view full) need to be provided, as follows: (1) the car well into the barrier, (2) the airbag in deployment, (3) airbag fully deployed and (4) head of the dummy reaching the full extent of forward motion. The list of photos is intended to be used as a guide and if the laboratory photographer finds some other interesting or unusual test occurrences these should also be photographed.

5 SIDE MOVING DEFORMABLE BARRIER IMPACT

5.1 Vehicle and Barrier Markings

Euro NCAP markings should be attached to the exterior of the vehicle as shown in Figure 1, Section 2.2.1. The unique Euro NCAP test reference number should be placed below each Euro NCAP logo (see Section 2.2.3). Euro NCAP markings should also be stuck to the front of the trolley on both sides. Test house logos may be added to the trolley provided that they do not detract attention from the Euro NCAP markings.

5.2 Camera Locations and Views

A minimum of 5 cameras should be installed around the test vehicle, positioned as indicated in Figure 5 below. Two (2) additional on-board cameras to assess child dummy head containment are to be used and also one real time camera. Where required there will also be two additional onboard cameras for the driver and passenger front and rear views.

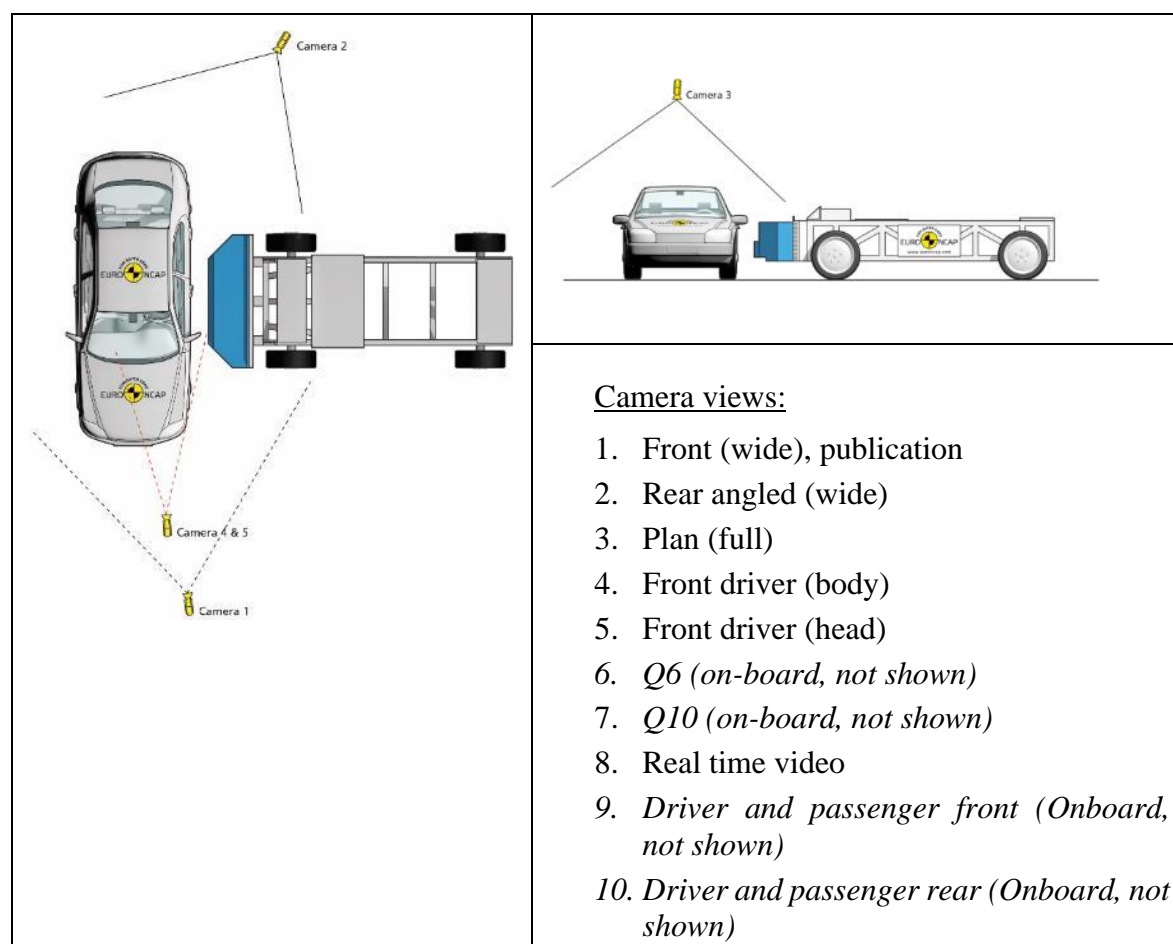












Figure 5: Locations for Cameras 1 to 5 (Side Moving Deformable Barrier).

Table 5: List of camera views (Side Moving Deformable Barrier).

	Camera:	1
	Filename:	1_Front_wide_publication
	Description:	Trolley logo to 1 car width beyond non-struck side of vehicle @ T0
	Camera:	2
	Filename:	2_Rear_angle_wide
	Description:	Angled view to catch any door opening on struck side
	Camera:	3
	Filename:	3_Plan_full
	Description:	Front of trolley to one car width beyond non-struck side of vehicle. The entire vehicle should be in view @ T0.
	Camera:	4
	Filename:	4_driver_body
	Description:	Edge of driver's door to at least the outboard edge of front passenger seat. The driver's thorax and abdomen should be visible @ T0

	Camera:	5
	Filename:	5_driver_head
	Description:	Edge of driver's door to at least the outboard edge of front passenger seat. The driver's head should be visible @ T0
	Camera:	6 (on-board) Q6
	Filename:	6_Q6_onboard
	Description:	Required view @ T0: Passenger head restraint may be removed if possible. The wings of CRS should be visible, possibly by marking with white tape.
	Camera:	7 (on-board) Q10
	Filename:	7_Q10_onboard
	Description:	Required view @ T0: Camera can only be placed slightly rotated as the driver head rest will usually prevent lining the camera up with Q10 dummy centreline.

	Camera:	8
	Filename:	8_Rear_angle_realtime
	Description:	Angled view to catch any door opening on struck side.
	Camera:	9
	Filename:	9_DriverPass_Front
	Description:	Both occupants (where fitted), both B-pillars and front door panels visible
	Camera:	10
	Filename:	10_DriverPass_rear
	Description:	Both occupants (where fitted), both B-pillars and rear panels visible

5.3 Still Photographs

Table 6: List of photos (Side Moving Deformable Barrier).

No.	Pre	Post	Media	View
1	•	•		Front view of barrier.
2	•	•		Side view of barrier.
3	•	•		Side view of barrier at 45 degrees to front.
4	•	•	•	Side view of barrier with vehicle, from front of vehicle (for publication).
5		•	•	Side view of barrier with vehicle, from rear of vehicle (for publication).
6		•	•	Wide view of entire trolley and entire vehicle showing struck side, from front of vehicle (for publication).
7		•	•	Wide view of entire trolley and entire vehicle showing struck side, from rear of vehicle (for publication).
8	•	•	•	Car LHS, with camera centred on B-post waist, showing full car (for publication).
9	•	•		Car LHS, with camera centred on B-post waist, showing the rear passenger compartment.
10	•	•		Car LHS, with camera aimed at waist height, showing driver's compartment.
11	•	•	•	Car LHS at 45 degrees to rear (for publication).
12	•	•	•	Car LHS at 45 degrees to front (for publication).
13	•	•	•	Front view of car (for publication).
14	•	•	•	Car RHS, with camera centred on B-post waist, showing full car (for publication).
15	•	•		Car RHS, with camera centred on B-post waist, showing the rear passenger compartment.
16		•		To show position of all door latches and/or open doors.
17	•	•		Driver & seat through open driver's door to show driver compartment and position of seat relative to the sill.
18	•	•		To show area immediately in front of driver.
19	•	•		To show child dummies and restraints through LHS rear door.
20	•	•		To show child dummies and restraints through RHS rear door.
21		•		Car and barrier at rest at 45 degrees to front of car.
22		•		Car and barrier at rest at 45 degrees to rear of car.

After Dummy Removal:

No.	Pre	Post	View
23		•	View through RHS front passenger door of driver's door interior panel & paint marks from dummy ribs.

Note: The above photos are for a LHD car, for a RHD car camera locations will switch sides.

Screen Captures / On Test Stills:

In addition to the pre- and post-test stills, a set of pictures captured during the crash (front wide view) need to be provided, as follows: (1) barrier well into the car, (2) the airbag in deployment, (3) airbag fully deployed and (4) dummy's head in airbag.

The list of photos is intended to be used as a guide and if the laboratory photographer finds some other interesting or unusual test occurrences these should also be photographed.

6 SIDE OBLIQUE POLE IMPACT

6.1 Vehicle and Pole Markings

Euro NCAP markings should be attached to the exterior of the vehicle as shown in Figure 1, Section 2.2.1. The unique Euro NCAP test reference number should be placed below each Euro NCAP logo (see Section 2.2.3). No markings, targets excluded, are allowed on the pole itself. This includes test house logos.

6.2 Camera Locations and Views

A minimum of 6 cameras should be installed around the test vehicle, positioned as indicated in Figure 6 below. No on-board cameras are required.

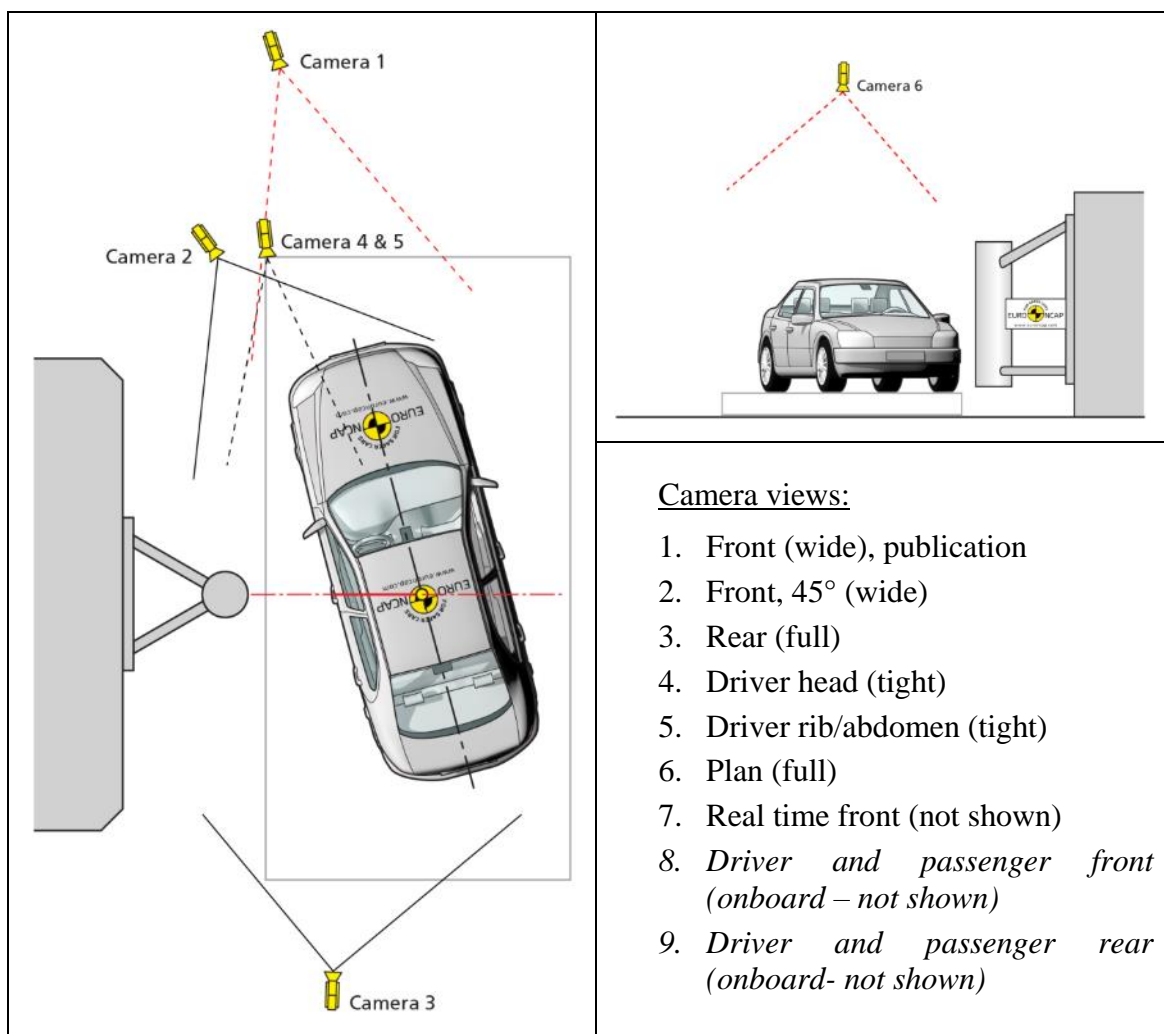


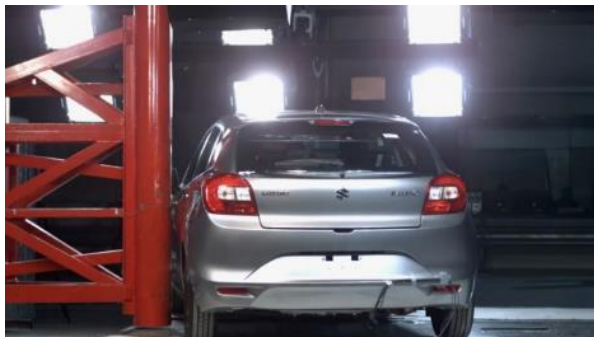








Figure 6: Locations for Cameras 1 to 6 (Side Oblique Pole).

Table 7: List of camera views (Side Oblique Pole).

	Camera:	1
	Filename:	1_Front_wide_publication
	Description:	Camera aligned with vehicle centreline @ T0. Rear of pole to 1m beyond non-struck side of vehicle
	Camera:	2
	Filename:	2_Front_45_wide
	Description:	Camera positioned at 45° to vehicle centreline @ T0. Rear of pole to 1m beyond non-struck side of vehicle
	Camera:	3
	Filename:	3_Rear_full
	Description:	Rearward of pole to 1m beyond non-struck side of vehicle. The entire vehicle should be in view @ T0 and the camera should be positioned to be perpendicular to direction of moving floor.
	Camera:	4
	Filename:	4_Driver_head_tight
	Description:	Pole to the passenger side of the vehicle @ T0. Camera should be positioned to be perpendicular to direction of moving floor.

	Camera:	5
	Filename:	5_Driver_body
	Description:	Passenger side of vehicle to the pole. The driver's thorax and abdomen should be visible @ T0
	Camera:	6
	Filename:	6_Plan_full
	Description:	Entire vehicle should be in view @ T0
	Camera:	7
	Filename:	7_Front_realtime
	Description:	Real time view using same view as high speed camera view 2.
	Camera:	8
	Filename:	8_DriverPass_Front
	Description:	Both occupants (where fitted), both B-pillars and front door panels visible
	Camera:	9
	Filename:	9_DriverPass_Rear
	Description:	Both occupants (where fitted), both B-pillars and rear panels visible

6.3 Still Photographs

Table 8: List of photos (Side Oblique Pole).

No.	Pre	Post	Media	View
Car on carrier against pole:				
1	•	•	•	Top view of full car, carrier and pole (for publication).
2	•	•	•	Front view of full car, carrier and pole (for publication).
3	•	•		Rear view of full car, carrier and pole.
4	•	•	•	Side view of car, carrier and pole at 45 ° to front, impact side (for publication).
5	•	•	•	Side view of car, carrier and pole at 45 ° to rear, impact side (for publication).
6		•	•	Wide view of pole and entire vehicle, from front of vehicle (for publication).
7		•	•	Wide view of pole and entire vehicle, from rear of vehicle (for publication).
Car and carrier away from pole:				
8	•	•	•	Side view car/carrier impact side, showing full car (for publication).
9	•	•		Side view car/carrier non-impact side, showing full car.
10		•		To show position of all door latches and/or open doors.
11	•			Side view through open driver's door on driver & seat to show driver compartment and position of seat relative to the sill.
12	•			Detail view on driver's legs and feet through open door.
13	•	•		Side view through open front passenger door to show driver.
14	•	•		Side view of car/carrier impact side centred on impact line showing front door and B-post.
15	•			Front/side view of pole.
16		•		Front view of dummy through front windscreen.
17	•	•		Inside car view on abdomen/pelvis area.
After dummy removal				
18		•		Detail view(s) on paint marks on the driver's door and seat

Note: The above photos are for a LHD car, for a RHD car camera locations will switch sides.

Screen Captures / On Test Stills:

In addition to the pre- and post-test stills, a set of pictures captured during the crash (front wide or front 45° wide) need to be provided, as follows: (1) showing car well into pole, (2) the airbag in deployment, (3) airbag fully deployed and (4) dummy's head in airbag.

The list of photos is intended to be used as a guide and if the laboratory photographer finds some other interesting or unusual test occurrences these should also be photographed.

7 WHIPLASH TESTS

7.1 Sled, Seat and Dummy Markings

In order to monitor the seat and the dummy film targets should be applied to seat, sled and dummy. Targets should be securely affixed to areas of the seat which will not be deformed by the dummy during the test. The required target definitions are illustrated in Figure 7a and b are given along with their reference points in Table 9. A plain light coloured, even surface and non-reflective screen or wall should be placed behind the sled with the Euro NCAP logo and the official test reference number below clearly in view.

In order to track the trajectories of the dummy and seat with reference to the sled the dimensions in Table 10, Figure 7b should be recorded. All measurements shall be measured from the camera film plane to the reference targets and recorded in mm.

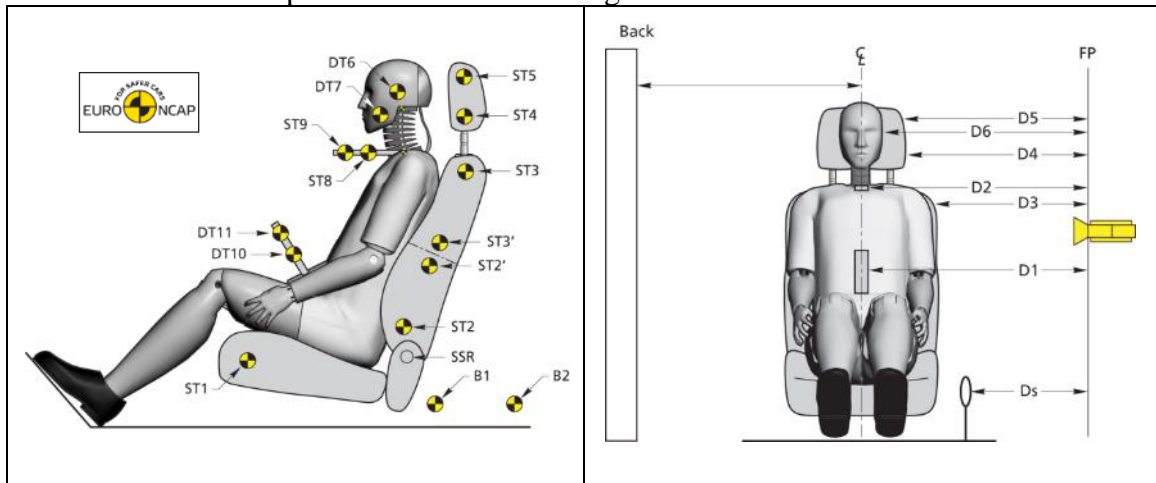


Figure 7: (a) Video motion targets and Euro NCAP label placement, left;
(b) Video tracking measurements, right.

Table 9: Video motion target placement description (Whiplash).

Designation	Description
B1	Sled base #1
B2	Sled base #2
DT6	Head CoG
DT7	Cheek
DT8	T1 bracket proximal
DT9	T1 bracket distal
DT10	Pelvis bracket proximal
DT11	Pelvis bracket distal
ST1	Seat base forward
ST2	Seat back lower
ST2'	Seat back mid #1 *
ST3	Seat back upper
ST3'	Seat back mid #2 *
ST4	Lower head restraint
ST5	Upper head restraint
SRR	Seat recliner centre

* These target locations are required only for 2 part hinged seatbacks.

Table 10: Video tracking measurement description (Whiplash).

Description	Measure	Reference
DS	Sled reference to focal plane	Sled – FP
D1	Pelvis to focal plane	DT11 – FP
D2	T1 bracket to focal plane	DT9 – FP
D3	Seatback upper to focal plane	ST3 – FP
D4	Head restraint lower to focal plane	ST4 – FP
D5	Head restraint upper to focal plane	ST5 – FP
D6	Head CoG to focal plane	DT6 - FP



7.2 Camera Locations and Views

Two cameras are required (with acceleration sled system):

- Camera 1: The camera shall record a view of the entire test and the seat on the sled. The view should be such that 300ms of the test are in complete view from T0.
- Camera 2: The camera shall frame the head and neck of the dummy, and track the entire movement of the dummy during the test. The view should be such that 300ms of the test are in complete view from T0.

Care should be taken to ensure that camera placement is perpendicular to the direction of sled travel. Camera measurements should be taken to the film plane of the camera, from both the fixed targets and the head Centre of Gravity target. For off board camera views, compensation must be included in the film analysis to take account of parallax effects due to sled motion relative to the cameras.

Table 11: List of camera views (Whiplash).

	Camera:	1
	Filename:	1_Whiplash_Wide_publication
	Description:	Wide view showing all of seat and dummy including seat mounting & toeboard area.
	Camera:	2
	Filename:	2_Whiplash_tight
	Description:	Verify whether Euro NCAP logo and test reference number are in view.

7.3 Still Photographs

The following photographs will be taken pre and post-test unless otherwise indicated. Pre-test photographs will be taken with the dummy in the final position.

Table 12: List of photos (Whiplash).

No.	Pre	Post	View
1	•	•	Seat structure reference point
2	•	•	Seat track markings (both sides)
3	•	•	Close view of Head restraint test position (identifiable point and any visible notches)
4	•	•	Dummy and seat at 45 degrees to rear
5	•	•	Side view of dummy and seat
6	•	•	Dummy and seat at 45 degrees to front
7	•	•	Front view of dummy and seat
8	•	•	Front view of dummy showing top of head down to knees
9	•	•	Dummy head down to thorax and seat at 45 degrees to rear
10	•	•	Dummy head down to thorax and seat at 20 degrees to rear
11	•	•	Side view of dummy head down to thorax
12	•	•	Dummy head down to thorax and seat at 45 degrees to front
13	•	•	Dummy head down to thorax and seat at 20 degrees to front
14	•	•	Side view of dummy showing thorax down to feet, camera centred on seat base
15	•	•	Tight side view of dummy showing thorax down to feet, camera centred on seat base
16	•	•	Side view of dummy and seat (portrait) showing seat back to knees
17	•	•	Tight side view of dummy and seat (portrait) showing seat back to pelvis
18		•	Any damage to seat (multiple aspects required)
19		•	Any damage to dummy (multiple aspects required)
20		•	Seat variant and trim condition (multiple aspects required)
21		•	Seat adjustment controls (multiple aspects required)

Screen Captures / On Test Stills:

In addition to the pre- and post-test stills, a picture captured during travel needs to be provided, as follows: (1) high severity pulse - maximum seat deflection.

8 PEDESTRIAN SUBSYSTEM TESTS

8.1 Vehicle and Other Markings


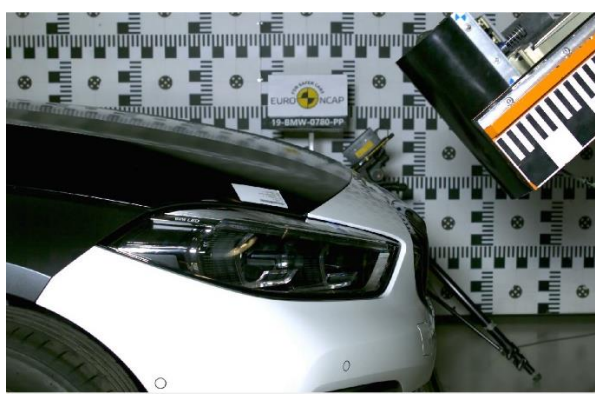
To hide any background test equipment or personnel, a plain light coloured, non-reflective screen should be placed near (behind) the vehicle test area with the Euro NCAP logo and official test reference number clearly visible in view. Test house logos and/or test number may be shown provided that they do not detract attention from the Euro NCAP markings (see Section 2.2.2). There should be no markings on the vehicle, including test house logos.

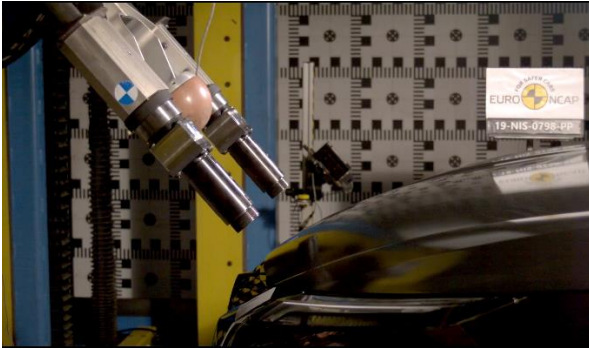
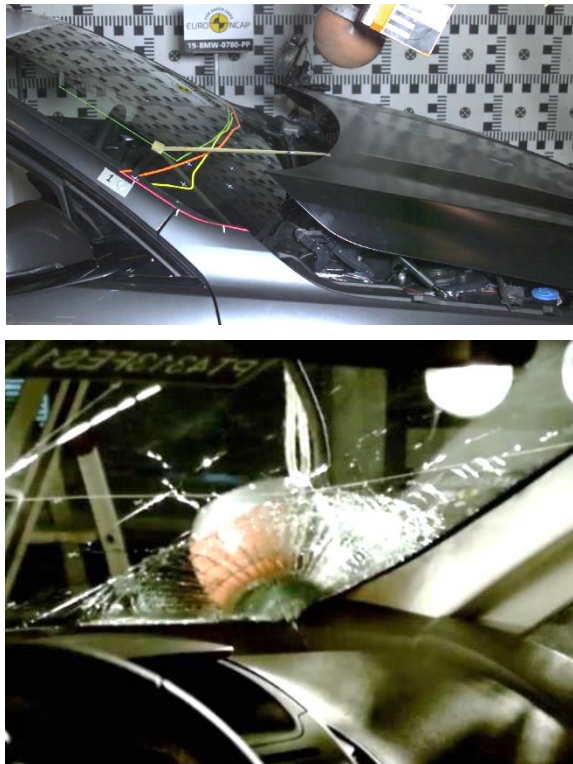
8.2 Camera Locations and Views

A single camera is required to record the impact events. The camera orientation should be aligned perpendicular to the vehicle centreline and adjusted in height in accordance with the type of test. Euro NCAP requires at least one HD quality high speed film recording per pedestrian impactor type for each vehicle model tested (4 in total).

Care should be taken that the pedestrian test area is sufficiently lit.

Table 13: List of camera views (Pedestrian Subsystem).

	Camera:	1
	Filename:	1_Lower_leg_publication
	Description:	Camera perpendicular to vehicle centreline @ T0. Launcher plate should be visible. Left or right side views are allowed.
	Camera:	2
	Filename:	2_Upper_leg_publication
	Description:	Camera perpendicular to vehicle centreline @ T0. Impactor should be completely visible. Left or right side views are allowed

	Camera:	3
	Filename:	3_Ped_child
	Description:	<p>Camera perpendicular to vehicle centreline @ T0.</p> <p>Left or right side views are allowed.</p>
	Camera:	4
	Filename:	4_Ped_adult
	Description:	<p>Camera perpendicular to vehicle centreline @ T0.</p> <p>Left or right side views are allowed.</p> <p>Tests on windscreen may alternatively be filmed from the vehicle inside.</p>

8.3 Still Photographs

Pre- and post-test photos should be taken to show the undamaged/damaged test area pre/post-test (bonnet, A-pillars, glazing, leading edge and bumper). These must include at least one overview photo of each of the pre-test grid markings on the impact test zones.

For pedestrian testing only inspection quality photos are required by Euro NCAP.

9 AUTONOMOUS EMERGENCY BRAKING TESTS – CAR to CAR

9.1 Vehicle Markings

Euro NCAP markings should be attached to the exterior of the vehicle as shown in Figure 1, Section 2.2.1, except for the roof logo which is optional. The unique Euro NCAP test reference number should be placed below each Euro NCAP logo (see Section 2.2.3).

9.2 Camera Locations and Views

Off-board HD camera (camera 1):


- Start filming from far away, when the car approaches the target, both the car & target should be in view. When the car is about to brake, view should start to zoom in until the car has stopped. Only the car & target should be in view. The angle should be as perpendicular as possible to the car and target.
- For at least half of the runs required under media films below (Section 9.3.b), a drone must be used in replacement of this view. Start filming following the car. When the car approaches the target, both the car & target should be in view. The angle should be as perpendicular as possible to the car and target in order to show the action.


On-board camera (cameras 2 and 3):

- Camera 2: “Go Pro” or equivalent inside the car filming the view in front. No test equipment (e.g. steering robot) should be in view.
- Camera 3: “Go Pro” or equivalent inside the car filming the dashboard. The time window for recording should be set to [-5sec to +5sec].

For the sound recording there should be no talking audible on the video

Table 14: List of camera views (Autonomous Emergency Braking Car to Car).

	Camera:	1
	Filename:	1_AEB_Wide
	Description:	Wide view initially. When the car is about to brake, zoom in until the car has stopped. Only car and target in view. Angle should be as perpendicular as possible to the car and target.

	Camera:	2 (on-board)
	Filename:	2_Forward_onboard
	Description:	“Go pro” (or equivalent type camera) inside, looking in forward direction. No test equipment should be in view.

	Camera:	3 (on-board)
	Filename:	3_dashboard
	Description:	“Go pro” (or equivalent type camera) inside, looking in forward direction towards dashboard, instrumentation cluster, HUD, etc. Visual/Audio warning must be captured.

9.3 Selection of Views

The camera views to be provided to the Euro NCAP Secretariat as well as the number of runs vary depending on the film quality (*media or inspection quality*):

a) Inspection Films

- All runs required (AEB and FCW)
- Camera views needed:

Off-board Camera 1	On-board Camera 2	Dashboard Camera 3
No	Yes	Yes

b) Media Films

- Runs:

For each vehicle Euro NCAP will provide a specific list for the predicted vehicle performance according to the table below:

	GOOD	ADEQUATE	MARGINAL	WEAK	POOR
CCRs CCRm CCRB	Random selected test point with GREEN result (avoidance)	Random selected test point with YELLOW result (mitigation) if not available use ORANGE	Random selected test point with ORANGE result (mitigation) if not available use BROWN	Random selected test point with BROWN result (mitigation)	Random selected test point with BROWN result and highest impact speed (mitigation)
CCFtap	Highest avoidance				

- Camera views needed:

Off-board Camera 1	On-board Camera 2	Dashboard Camera 3
Yes	Yes	Yes

9.4 Still Photographs

Post-test photos should be taken in case of suspected damage to vehicle front-end or sensor array.

10 AUTONOMOUS EMERGENCY BRAKING TESTS – VRU

10.1 Vehicle Markings

Euro NCAP markings should be attached to the exterior of the vehicle as shown in Figure 1, Section 2.2.1, except for the roof logo which is optional. The unique Euro NCAP test reference number should be placed below each Euro NCAP logo (see Section 2.2.3).

10.2 Camera Locations and Views

Off-board HD camera (camera 1):

- At the start of filming the car and target should be in view with the target moving towards the camera. The camera should be positioned at an angle of approximately 45degrees to the target's motion. When the car is about to brake, view should start to zoom in until the car has stopped.
- For at least half of the runs required under media films below (Section 10.3.b), a drone must be used in replacement of this view. Start filming following the car. When the car approaches the target, both the car & target should be in view. The angle should be as perpendicular as possible to the car and target in order to show the action.

On-board camera (cameras 2 and 3):

- Camera 2: “Go Pro” or equivalent inside the car filming the view in front. No test equipment (e.g. steering robot) should be in view.
- Camera 3: “Go Pro” or equivalent inside the car filming the dashboard.


Table 15: List of camera views (Autonomous Emergency Braking VRU).


	Camera:	1
	Filename:	1_AEB_VRU_Wide
	Description:	Wide view initially. Car and target in view with target moving towards camera. Camera angled at approximately 45degrees

	Camera:	2 (on-board)
	Filename:	2_Forward_onboard
	Description:	“Go pro” (or equivalent type camera) inside, looking in forward direction. No test equipment should be in view.
	Camera:	3 (on-board)
	Filename:	3_dashboard
	Description:	“Go pro” (or equivalent type camera) inside, looking in forward direction towards dashboard, instrumentation cluster, HUD, etc. Visual/Audio warning must be captured.

Camera views for CBDA scenarios

	Camera:	1
	Filename:	1_CBDA_VRU_Wide
	Description:	Wide view initially. Car and target in view with target moving towards camera. Camera angled at approximately 45degrees.

	Camera:	2 (onboard)
	Filename:	2_CBDA_VRU
	Description:	“Go pro” (or equivalent type camera) on the EBT looking forward with the test vehicle in view.

	Camera:	3 (on-board)
	Filename:	3_CBDA_dashboard
	Description:	<p>“Go pro” (or equivalent type camera) inside, looking in oblique direction towards instrumentation cluster and outboard rear view mirror. Visual/Audio warning must be captured. Door handle operation must also be visible.</p> <p>Use multiple cameras to view all items above if required.</p>

10.3 Selection of Views

The camera views to be provided to the Euro NCAP Secretariat as well as the number of runs vary depending on the film quality (media or inspection quality):

a) Inspection Films

- All runs required
- Camera views needed:

Off-board Camera 1	On-board Camera 2	Dashboard Camera 3
No	Yes	Yes

b) Media Films

- Runs:

For each vehicle Euro NCAP will provide a specific list for the predicted vehicle performance according to the table below:

	GOOD	ADEQUATE	MARGINAL	WEAK	POOR
CPNC CPFA CPNA25 CPNA25 @ night CPLA50 CPLA50 @ night	Highest avoidance speed	Highest mitigation speed (>75% speed reduction)	Highest mitigation speed (>50% speed reduction)	Highest mitigation speed (>25% speed reduction)	No performance
CPTA CPRA	Highest avoidance	Highest avoidance	Highest avoidance	Highest avoidance	No performance
CBFA CBNA CBNAO CBLA50	Highest avoidance speed	Highest mitigation speed (>75% speed reduction)	Highest mitigation speed (>50% speed reduction)	Highest mitigation speed (>25% speed reduction)	No performance

- Camera views needed:

Off-board Camera 1	On-board Camera 2	Dashboard Camera 3
Yes	Yes	Yes

10.4 Still Photographs

Post-test photos should be taken in case of suspected damage to vehicle front-end or sensor array.

11 LANE SUPPORT SYSTEMS TEST

11.1 Vehicle Markings

Euro NCAP markings should be attached to the exterior of the vehicle as shown in Figure 1, Section 2.2.1, except for the roof logo which is optional. The unique Euro NCAP test reference number should be placed below each Euro NCAP logo (see Section 2.2.3).

11.2 Camera Locations and Views


Off-board HD camera (camera 1):




- The camera should be on the road, looking at the approaching car. Please position the camera as perpendicular as possible to the road and in such a way that lane departure occurs when car is still heading towards the camera.
- For at least half of the runs required under media films below (Section 11.3.b), a drone must be used in replacement of this view. The camera should follow the car as close as possible.

On-board camera (cameras 2,3 and 4):

- Camera 2: “Go Pro” or equivalent inside the car (in order for the warning sound to be heard) filming the view in front. No test equipment (e.g. steering robot) should be in view.
- Camera 3: “Go Pro” or equivalent with the camera on the front door, aimed forwards at the road, to show clearly the lane departure
- Camera 4: “Go Pro” or equivalent inside the car filming the dashboard.

Table 16: List of camera views (Lane Support Systems).

	Camera:	1
	Filename:	1_LSS_Roadside
	Description:	Camera positioned on road or elevated – as perpendicular as possible to the road - to record approaching car and road markings. Any departure should be within view.

	Camera:	2 (on-board)
	Filename:	2_Forward_onboard
	Description:	“Go pro” (or equivalent type camera) inside, looking in forward direction. No test equipment should be in view.
	Camera:	3 (on-board)
	Filename:	3_Door_Outside
	Description:	“Go pro” (or equivalent type camera) Outside mounted to door panel to clearly show lane departure. View should be aimed forwards.
	Camera:	4
	Filename:	4_dashboard
	Description:	“Go pro” (or equivalent type camera) inside, looking in forward direction towards dashboard, instrumentation cluster, HUD, etc. Visual/Audio warning must be captured.

11.3 Selection of Views

The camera views to be provided to the Euro NCAP Secretariat as well as the number of runs vary depending on the film quality (*media or inspection quality*):

a) Inspection Films

- All runs required
- Camera views needed:

Off-board Camera 1	On-board Camera 2	Door Outside Camera 3	Dashboard Camera 4
Yes	Yes	Yes	Yes

b) Media Films

- Runs:
- One test scenario per type of assessment. The different types of assessment being, depending on the car : LKA, RE, oncoming, overtaking.

ELK – Road Edge	0.5 m/s with least amount of lines where the vehicle scores points
ELK – Solid Line	0.5 m/s
ELK - Oncoming	0.6 m/s, only when test is performed with GVT
ELK - Overtaking	0.7 m/s Intentional GVT @ 72 km/h 0.7 m/s Intentional GVT @ 80 km/h
LKA	0.5 m/s Dashed Line @ passenger side

- Camera views needed:

Off-board Camera 1	On-board Camera 2	Door Outside Camera 3	Dashboard Camera 4
Yes	No	Yes	Yes

11.4 Still Photographs

Post-test photos should be taken in case of suspected damage to vehicle front-end or sensor array.