



2025





Adult Occupant







Child Occupant

84%

Vulnerable Road Users







Safety Assist

80%

SPECIFICATION

Tested Model	BMW 1-Series 1.5 M Sport, LHD
Body Type	- 5 door hatchback
Year Of Publication	2025
Kerb Weight	1541kg
VIN From Which Rating Applies	- all BMW 1-Series
Class	Small Family Car



SAFETY EQUIPMENT

	Driver	Passenger	Rear
FRONTAL CRASH PROTECTION			
Frontal airbag	•	•	_
Belt pretensioner	•	•	•
Belt loadlimiter	•	•	•
Knee airbag	×	×	_
LATERAL CRASH PROTECTION			
Side head airbag	•		•
Side chest airbag	•	•	•
Side pelvis airbag	•	•	•
Centre Airbag	•	×	_

	Driver	Passenger	Rear
CHILD PROTECTION			
Isofix/i-Size	_	•	•
Integrated CRS	_	×	×
Airbag cut-off switch	_	•	_
Child presence detection	_	×	×
SAFETY ASSIST			
Seat Belt Reminder	•	•	•



SAFETY EQUIPMENT (NEXT)

OTHER SYSTEMS	
Active Bonnet	•
AEB Vulnerable Road Users	
AEB Pedestrian - Reverse	0
Cyclist Dooring Prevention	
AEB Motorcyclist	
AEB Car-to-Car	
Speed Assistance	
Lane Assist System	
Fatigue / Distraction Detection	•

Note: Other equipment may be available on the vehicle but was not considered in the test year.

Fitted to the vehicle as standard	Fitted to the vehicle as part of the safety pace

O Not fitted to the test vehicle but available as option or as part of the safety pack

★ Not available — Not applicable







Total 31.2 Pts / 78%







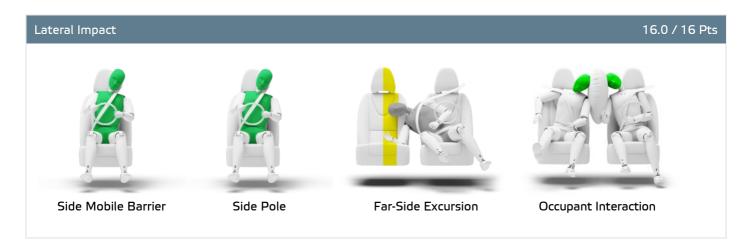

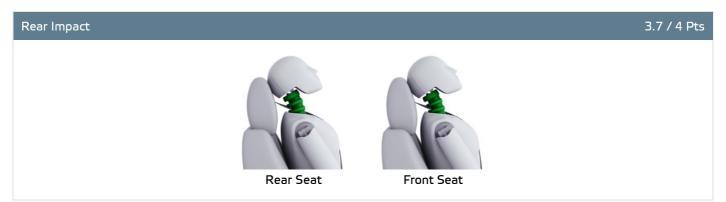



ADULT OCCUPANT

Total 31.2 Pts / 78%

GOOD ADEQUATE	MARGINAL WEAK POOR
Rescue and Extrication	2.7 / 4 Pts
Rescue Sheet	Available, ISO compliant
Advanced eCall	Available
Multi Collision Brake	Available
Submergence Check	Compliant

Comments

The passenger compartment of the BMW 1-Series remained stable in the frontal offset test. Dummy readings indicated weak protection of the driver's chest, based on dummy readings of compression. Protection of the driver's left leg was also weak, with marginal protection of the front occupants' legs in general. Analysis of the deceleration of the impact trolley during the test, and analysis of the deformable barrier after the test, revealed that the BMW 1-Series would be a moderately benign impact partner in a frontal collision. In the full-width rigid barrier test chest protection was rated as weak both for the driver and the rear passenger, in both cases a result of compression. In both the side barrier test and the more severe side pole impact, good protection was provided to all critical body areas and the BMW 1-Series scored maximum points in this part of the assessment. Control of excursion (the extent to which a body is thrown to the other side of the vehicle when it is hit from the far side) was found to be adequate. The BMW 1-Series has a countermeasure to mitigate against occupant-to-occupant injuries in such impacts. The airbag performed well in Euro NCAP's tests with dummy readings indicating good protection for both the driver and passenger. Tests on the front seats and head restraints demonstrated good protection against whiplash injuries in the event of a rear-end collision. A geometric analysis of the rear seats also indicated good whiplash protection. The car has an advanced eCall system which alerts the emergency services in the event of a crash, and a system to prevent secondary impacts after the car has been in a collision. BMW demonstrated that the doors and windows would be openable to allow occupants to escape in the event of vehicle submergence.



Total 41.6 Pts / 84%



Crash Test Performance based on 6 & 10 year old children

23.6 / 24 Pts





Restraint for 6 year old child: Britax Römer Kidfix M i-size Restraint for 10 year old child: Graco Booster Basic R129

6.0 / 13 Pts Safety Features

	Front Passenger	2nd row outboard	2nd row center
Isofix	•	•	×
i-Size	•	•	×
Integrated CRS	×	×	×
Top tether	•	•	×
Child Presence Detection	×	×	×

Fitted to test car as standard

O Not on test car but available as option

X Not available

CRS Installation Check 12.0 / 12 Pts

🐚 i-Size	Seat Position				
	Fro	ont		2nd row	
		⊗ *⁄ ₂	Left	center	Right
٤	•	×	•	_	•

Easy

Difficult

Safety critical

★ Not allowed



Airbag ON Rearward facing restraint installation not allowed

🎇 Airbag OFF



CHILD OCCUPANT

Total 41.6 Pts / 84%

(Isofix	Seat Position				
	Fro	ont		2nd row	
		⊗ *⁄ ₂	Left	center	Right
	•	×	•	_	•
\\\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\	×	•	•	_	•
K	•	×	•	_	•
Ľ	•	×	•	_	•
<u> </u>	•	×	•	_	•
	×	•	•	_	•

Easy Difficult Safety critical × Not allowed

Airbag ON Rearward facing restraint installation not allowed

⊗∴ Airbag OFF

Seatbelt Attached	Seat Position				
	Fro	Front		2nd row	
		⊗• <u>′</u> 2	Left	center	Right
	×	•	•	•	•
	•	×	•	•	•
E	•	×	•	•	•
L	•	×	•	•	•
	•	×	•	×	•
	×	•	•	×	•

Easy Difficult

Safety critical

× Not allowed

Airbag ON Rearward facing restraint installation not allowed

🎇 Airbag OFF





Total 41.6 Pts / 84%

Comments

In the frontal offset test, protection of all critical parts of the body was good or adequate for both the 6 and 10 year dummies. In the side barrier impact, protection of all critical parts of the body was good for both the 6 and 10 year dummies. The front passenger airbag can be disabled to allow a rearward-facing child restraint to be used in that seating position. Clear information is provided to the driver regarding the status of the airbag and the system was rewarded. The BMW 1-Series is not equipped with 'child presence detection', a system which can alert others if children have been left in the car. All of the child restraint types for which the BMW 1-Series is designed could be properly installed and accommodated in the car.



🚶 VULNERABLE ROAD USERS

Total 53.9 Pts / 85%

GOOD	ADEQUATE	MARGINAL	WEAK	POOR	

VRU Impact Protection

29.8 / 36 Pts



Pedestrian & Cyclist Head	12.5 Pts
Pelvis	4.2 Pts
Femur	4.5 Pts
Knee & Tibia	8.6 Pts

VRU Impact Mitigation 24.2 / 27 Pts

System Name	Warning Function for Pedestrians
Туре	Auto-Brake with Forward Collision Warning
Operational From	5 km/h
PERFORMANCE	

AEB Pedestrian 6.6 / 9 Pts

Scenario	Day time	Night time
Car reversing into adult or child		_
Adult crossing a road into which a car is turning		_
Adult crossing the road		
Child running from behind parked vehicles		
Adult along the roadside		

Currently not tested

AEB Cyclist 7.8 / 8 Pts

Scenario	Day time
Approaching cyclist crossing from behind parked vehicles	
Turning across path of an oncoming cyclist	
Approaching a crossing cyclist	
Approaching a cyclist along the roadside	



🚶 VULNERABLE ROAD USERS

Total 53.9 Pts / 85%

GOOD	ADEQUATE	MARGINAL	WEAK	POOR
Cyclist Dooring Pre	evention			0.8 / 1 Pts

Scenario	
Dooring a passing cyclist	warning, all side doors"

AEB Motorcyclist 6.0 / 6 Pts

Scenario	Autobrake function only	Driver reacts to warning
Approaching a stationary motorcyclist		
Approaching a braking motorcyclist		
Turn across the path of an oncoming motorcyclist		_

Currently not tested

Lane Support Motorcyclist

3.0 / 3 Pts

Scenario	Day time
Changing lane across the path of an oncoming motorcyclist	
Changing lane across the path of an overtaking motorcyclist	

Comments

The BMW 1-Series has an 'active' bonnet. Sensors in the bumper detect when a pedestrian has been struck and actuators lift the bonnet surface to provide more space to the hard structures underneath. BMW showed that the system worked robustly over a range of speeds and for different statures. Accordingly, the car was tested with the bonnet in the raised, deployed position. Protection of the head of a struck pedestrian or cyclist was largely good or adequate, with poor results recorded on the stiff windscreen pillars and at the base and top of the screen. Protection of the pelvis was good or adequate at all test locations. Protection of the femur was good at all test locations, while that of the knee and tibia was good or adequate at all test locations. The autonomous emergency braking system of the BMW 1-Series responds to vulnerable road users such as pedestrians and cyclists, as well as to other vehicles. In tests of its response to pedestrians, the system performed adequately but does not protect those to the rear of the car. The system performed well in tests of its reaction to cyclists, including 'dooring' in which a door is opened into the path of a cyclist approaching from behind. The system's response to motorcyclists was good.

System Name	Attentiveness Assistant
Туре	Indirect monitoring
Operational From	65 km/h
Fatigue	Drowsiness



Total 14.5 Pts / 80%

Lane Support	3.0 / 3 Pts
--------------	-------------

System Name	Lane Departure Warning with active return
Туре	LKA and ELK
Operational From	60 km/h
PERFORMANCE	
Emergency Lane Keeping	GOOD
Lane Keep Assist	GOOD
Human Machine Interface	GOOD

AEB Car-to-Car 8.2 / 9 Pts

System Name Front collision warning with brake intervention	
Type Autonomous emergency braking and forward collision warning	
Operational From	5 km/h
Sensor Used	camera

Scenario	Autobrake function only	Driver reacts to warning
Approaching a car crossing a junction		
Approaching a car head-on		_
Turning across the path of an oncoming car		_
Approaching a stationary car		
Approaching a slower moving car		_
Approaching a braking car		_

Currently not tested





Total 14.5 Pts / 80%

Comments

Overall, the performance of the autonomous emergency braking (AEB) system was good in tests of its reaction to other vehicles. A seatbelt reminder system is fitted as standard to the front and rear seats. The car has an indirect driver status monitoring system as standard, detecting driver fatigue but not distraction. The lane support system gently corrects the vehicle's path if it is drifting out of lane and also intervenes in some more critical situations. The speed assistance system identifies the local speed limit. The driver can choose to allow the limiter to be set automatically by the system.



RATING VALIDITY

Variants of Model Range

Body Type	Engine & Transmission	Model Name	Drivetrain	Rating Applies	
				LHD	RHD
5 door hatchback	1.5 petrol	116 118 * 220	4 x 2	✓	~
5 door hatchback	2.0 petrol	123 xDrive M135 xDrive	4 x 4	✓	✓
5 door hatchback	2.0 diesel	118d 120d	4 x 2	✓	✓

Annual Reviews and Facelifts

Date	Event	Outcome		
September 2025	Rating Published	2025 ★ ★ ★ ☆ ☆	✓	

^{*} Tested variant